



better together

Data sheet

DAC 32-50/G50V-G65V 3/4" EN+GTP (P)



General features

- Structure in GJL-250 cast iron;
- Seal in NBR rubber (if present);
- Epoxy-vinyl paint;
- Full free passage;
- Complete with fitting for connection to polyethylene tube (Ø 63 mm)
- Threaded outlet gas 2" and gas 2 1/2";
- Complete with pipe guide and sliding flange with stainless steel fasteners;
- Allows the pump intake port to be kept at optimal height, meaning there is no need to provide a step in the bottom of the tank;




All product images are indicative only

Accessory code

9028.002

Dimensional drawing

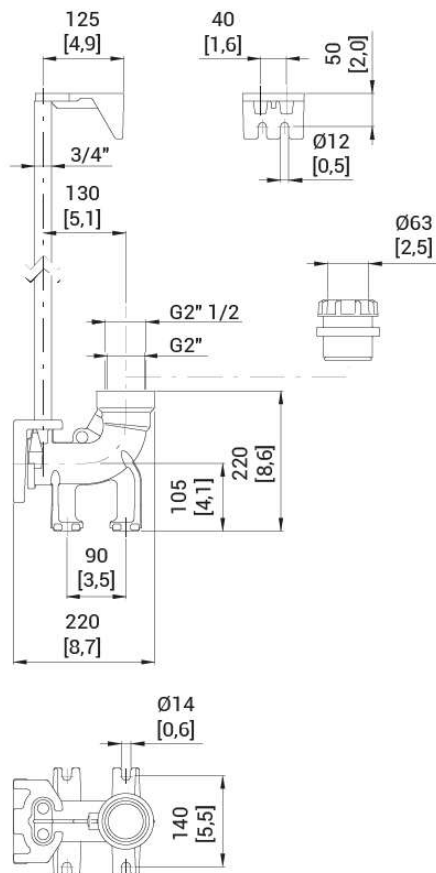

Technical characteristics

Discharge:	GAS 2" - 2½"
Suction:	DN32 PN6 - DN50 PN10 EN1092-2
Coupled pump max. weight (if specified):	-
Weight:	8 kg